


Specification

- Unique glossy IMD front cover, water splashing proof, corrosion resisting, ageing resisting.
- Adopts patent enclosed loop heating system, instant for hot water with less heating loss, nano insulation material which totally separates water from electricity.
- Multi-layer structure heating chamber form a long circulating water channel, no limescale, long lifespan.
- Electric leakage protection, anti-scalding protection, over-pressure and over-temperature protection. Water and electricity isolation protection.
- Direct temperature setting, automatically thermostat, the hot water temperature will be constant. Automatic memory function avoid repeated operation
- LED wide touch display screen to show the working condition, outlet temperature, power consumption and water consumption
- Fault auto-detection technique, the cause will be displayed automatically while failure.

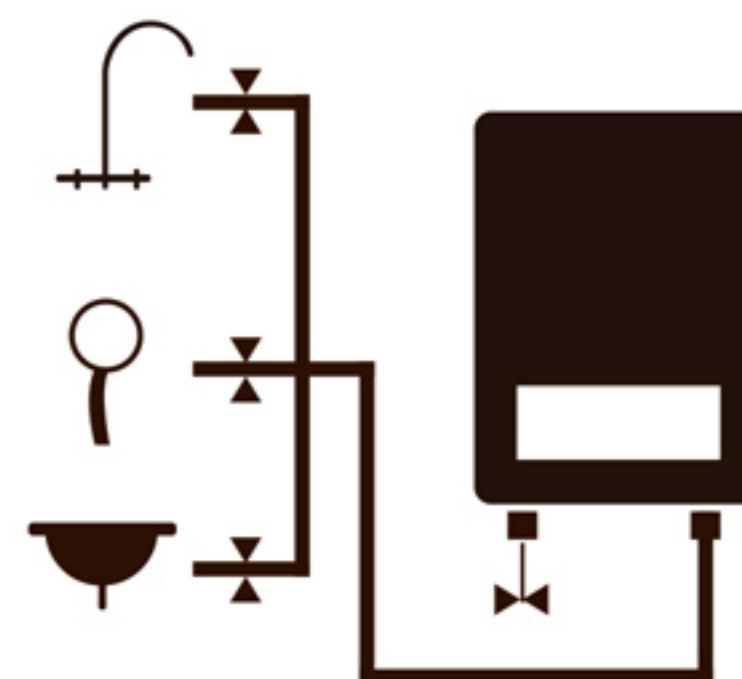

Technology Data

Model No.	XFJ309FDCH	XFJ312FDCH	XFJ315FDCH	XFJ318FDCH	XFJ321FDCH	XFJ324FDCH
Voltage	400V3~					
Power	9kW	12kW	15kW	18kW	21kW	24kW
Rated Current	3x13A	3x17.3A	3x21.7A	3x26.0A	3x30.3A	3x34.6A
Fuse rated current	16A	20A	25A	32A	40A	
Connection wire section	3*1.5mm ²		4*2.5mm ²	4*4mm ²		4*6mm ²
Temp. setting range	30-60°C					
Overheat protection	72°C					
Thermal cut-out (Manual reset)	90°C					
Safety Class	IP25					
Working Pressure	0.02-0.6MPa					
Efficiency Δt=30°C	4.3L/min	5.8L/min	7.2L/min	8.7L/min	10.1L/min	11.6L/min
Inlet and outlet section	G1/2"					
Product Size	385*260*90mm					
Gift Box Size	475*135*367mm					
Garton Size (4pcs/CTN)	570*490*385mm					
Loading Quantity	20'GP: 1000pcs 40'GP: 2000pcs 40HQ: 2120pcs					